


COMPETITIVE COMPARISON GUIDE

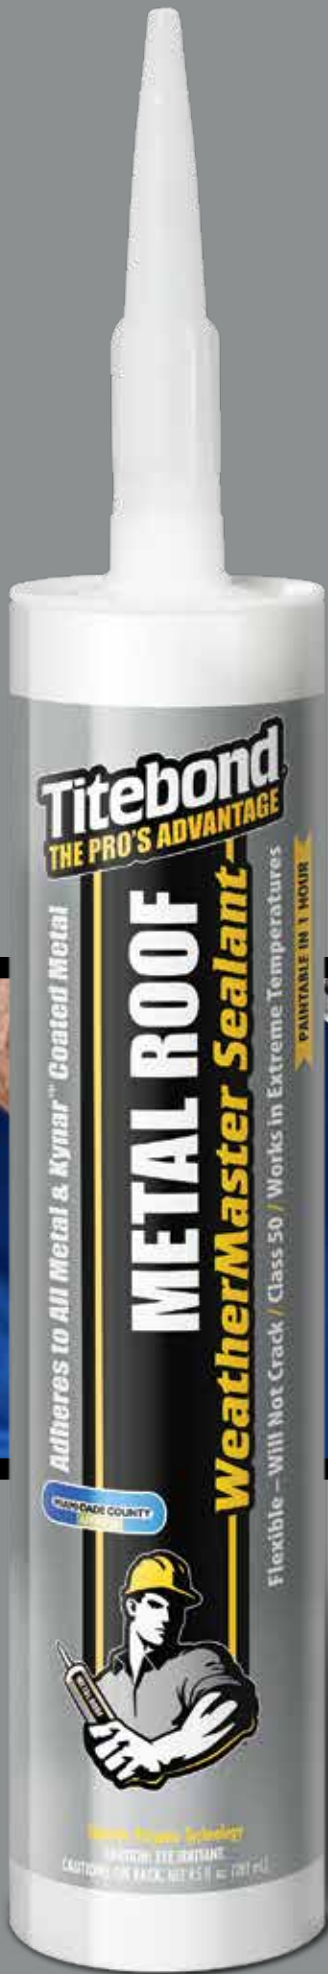

Titebond
THE PRO'S ADVANTAGE

	WeatherMaster™ METAL ROOF™	Chem Link™ DuraLink™ 50'	Chem Link™ M1'	Dow Corning® 795†
PAINTABLE	Yes, 1 Hour (Except Translucent)	Within 24 hours. Test and evaluate all paints before application.	Within 24 hours. Test and evaluate all paints before application.	No
% SOLIDS	100%	100%	100%	Not Stated
SHRINKAGE	0%	0%	0%	Not Stated
JOINT FLEXIBILITY	50%	50%	35%	50%
VOC-COMPLIANT	<50 g/L	<22 g/L	<17 g/L	32 g/L
GAP FILLING (WIDTH)	1"	2"	1"	Not Stated
COLD WEATHER EXTRUSION	0°F	32°F	32°F	50°F
FOAMBOARD	Yes	Yes	Yes	Not Stated
ODOR / VAPOR	Very Mild	Mild	Mild	Slight
OCCUPIED STRUCTURES	Yes	Yes	Yes	Yes; Only in a Well-ventilated Area
SERVICE TEMPERATURE	-75° to 212°F	-40° to 200°F	-40° to 200°F	-40° to 300°F
CARTRIDGE	Plastic (9.5 oz. Removable Nozzle) & 20 oz. Sausage Pack	Plastic (10.1 oz.), 20 oz. Sausages, 2 and 5 Gallon Pails or 50 Gallon Drums by Special Order	Plastic (10.1 oz. Fixed Nozzle), 5 oz. Squeeze Tube, 20 oz. Sausages, 28 oz., 2 and 5 Gallon Pails or 50 Gallon Drums by Special Order	Plastic (10.3 oz.), 20 oz. Sausages, 2 Gallon and 4.5 Gallon Bulk Containers
WARRANTY	Limited	Limited	Limited	Limited
STANDARD COLORS	100+ Colors	12 Colors	5 Colors	15 Colors
CLASS	Class 50	Class 50	Class 35	Class 50
MANUFACTURED	Owned and Made in the USA	Not Stated	Not Stated	Not Stated
SHELF LIFE	24 Months	12 Months, 6 Months for Pails	12 Months, 6 Months for Pails	12 Months

Geocel® 2300†	MasterSeal® NP1††	Novaflex® Metal Roof†	RainBuster® 900†	Sikaflex® 1a†
24 hours. Allow sealant to cure for 4 days if using a relatively inflexible paint.	Yes, compatibility test required.	No	After 72 hours.	Yes, compatibility test required.
Not Stated	100%	97%	96-99%	Not Stated
Not Stated	0%	0%	0%	Not Stated
Not Stated	35%	Not Stated	35%	35%
Not Stated	35 g/L	50 State VOC-compliant	VOC-compliant under AQMD & CARB	40 g/L
3/8"	1 1/2"	Not Stated	1"	1 1/2"
Warm Tube Below 40°F	Only if substrates are completely dry, clean and free of moisture. Store at room temperature for 24 hours before using.	0°F	20°F. If below 40°F, condition product at 70°F prior to using for best results.	40°F. For cold weather application, condition units at approximately 70°F; prior to using.
No	Not Stated	Not Stated	Not Stated	Not Stated
Not Stated; Do Not Breathe Vapor or Mist	Mild	None	Slight	Odorless
No	Ensure Adequate Ventilation	General Ventilation Recommended	Yes, Only in a Well-ventilated Area	Use Only With Adequate Ventilation
Not Stated	-40° to 180°F	-40° to 400°F	Not Stated	-40° to 170°F
Fiber (10.3 oz. & 29 oz.)	Fiber (10.1 oz. Fixed Nozzle) & 20 oz. ProPaks	Plastic (10.1 oz.), 20 oz. Sausage Packs, 5 Gallon Pail & 55 Gallon Drum	Fiber (10.1 oz.) & 20 oz. Sausage Tubes	Fiber (10.1 oz. Fixed Nozzle), 20 oz. Uni-Pac Sausages, 5 Gallon Pail & 55 Gallon Drum
Limited	Limited	Limited	Lifetime	1 Year
47 Colors	11 Colors	70+ Colors	6 Colors	9 Colors
Not Stated	Class 35	Class 35/50	Class 35	Class 35
Made in the USA	Not Stated	Made in the USA	Not Stated	Not Stated
12 Months	12 Months	18 Months	12 Months	12 Months, 6 Months for Pails and Drums



IDEAL FOR ▶ Metal Roofs / Trim / Architectural Metal Siding / General Roofing Applications / Galvanized Gutters / Downspouts

EXCELLENT ADHESION ▶ Adheres to all types of metal including coated panels such as Kynar™

JOINT MOVEMENT CAPABILITY ± 50% ▶ Permanently flexible – will not crack

WEATHER & UV RESISTANT ▶ Produces long-lasting weather-tight seals

ALL-WEATHER APPLICATION ▶ Applies in extreme weather conditions

PAINTABLE ▶ Painting may occur one hour after application with a water-based (latex-based) paint.

Provided information obtained from manufacturer's product labels, technical data sheets and SDS.

* Titebond WeatherMaster Metal Roof Translucent (#61111) is NOT paintable.

† ChemLink and Duralink are trademarks of Chem Link; Dow Corning is a registered trademark of Dow Corning Corporation; Geocel is a registered trademark of HIP, LLC; MasterSeal is a registered trademark and NP1 is a trademark of BASF; Novaflex is a registered trademark of Novagard Solutions; RainBuster is a registered trademark of Top Industrial, Inc.; Sikaflex is a registered trademark of Sika.

‡ Maximum temperature over 200°F is for short term exposures.

Visit Titebond.com for the most up-to-date product information.

Franklin International



Columbus, Ohio 43207 614.443.0241 Technical Service 1.800.347.4583 © 2020 01528_4796LN F1100

Titebond
THE PRO'S ADVANTAGE